weboost

# weBoost Installed | Office 200

**SKU:** 473047 **MAP:** $3,799.99




### FEATURES

- Best-in-class amplifier system for small-to-medium businesses and warehouses
- Covers 15,000 to 35,000 square feet
- Includes professional installation anywhere in the US
- Comes with 2 inside antennas for more complete coverage
- Is FCC approved and works on all U.S. carrier networks, including Verizon, AT&T, Sprint, T-Mobile, UScellular, and more

## About

Resolve cell signal issues with a quick, turnkey solution that includes complete, professional installation. **The weBoost | Installed Office 200** is our best-in-class amplifier solution, designed for small-to-medium businesses and warehouses. It comes with two low-profile antennas for optimal cell signal coverage throughout a commercial space. weBoost Installed | Office 200 is 5G compatible and improves cell signal on all U.S. carrier networks, including Verizon, AT&T, Sprint, T-Mobile, UScellular and others. weBoost Installed | Office 200 also comes with an industry-leading 3-year manufacturer's warranty and a 30-day money-back guarantee.

## Kit Includes


Professional Installation


Office 200


Outside Omni Plus (314423)


2x Low Profile Dome (314407)


Power Supply (850026)


2-Way Splitter (850034)

*Cables will be provided by installer


## Specifications

| | | |
|---|---|---|
| SKU NUMBER | 473047† | |
| FREQUENCIES | Band 12/17 | 700 MHz |
| | Band 13 | 700 MHz |
| | Band 5 | 850 MHz |
| | Band 4 | 1700/2100 MHz |
| | Band 25/2 | 1900 MHz |
| MAX GAIN | 72 dB | |
| IMPEDANCE | 75 Ohm | |
| POWER | 110-240V AC, 50-60 Hz, 20 W | |
| CONNECTORS | F-Female | |
| BOOSTER DIMENSIONS | 14.25 x 10.75 x 2.25 in | |
| BOOSTER WEIGHT | 7.7 lbs | |

†⚠**WARNING:** This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

weboost

# How It Works

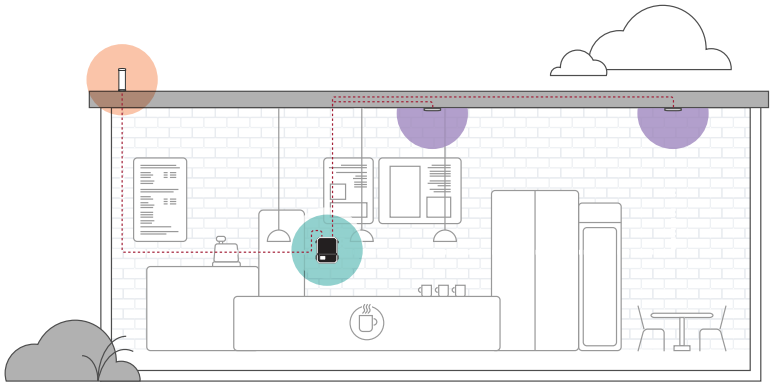

1. **Outside antenna:** The outside antenna communicates back and forth with nearby cell towers.
2. **Booster:** The booster amplifies any cell signals it receives from the outside antenna.
3. **Inside antennas:** The inside antennas broadcasts these signals for use throughout your business.

## Package Dimensions (Approx.)

20 L x 16 W x 14 H

| 20 in. x 14 in. | 16 in. x 14 in. | 20 in. x 16 in. | 15.2 lbs. |
|---|---|---|---|
| FRONT | SIDE | TOP/BOTTOM | WEIGHT |

**MASTER CARTON:** 20 L x 16 W x 14 H | 15.2 Lbs. | Qty 1

FOR PARTNER'S USE

## Support

3-Year Warranty from Purchase.

**Website:** http://support.weboost.com

**Phone:** +1 866 294 1660
Monday to Saturday

ONLY CELL BOOSTER • DESIGNED & ASSEMBLED IN USA •

## UPC

473047

8 10005 96314 5